

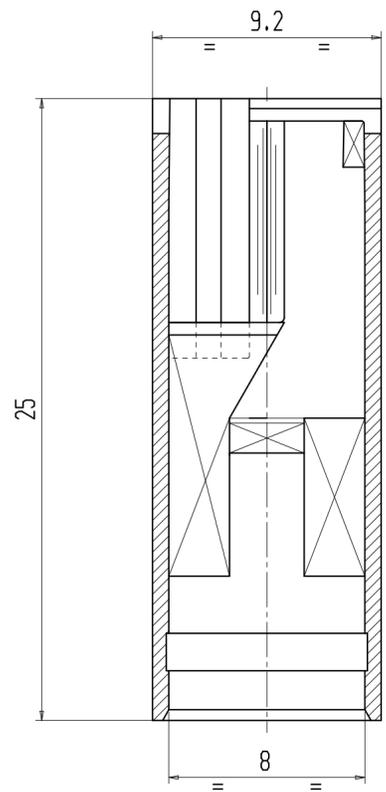


01 Cavity suitable for female terminal 6,3x0,8 mm (DIN 46247)

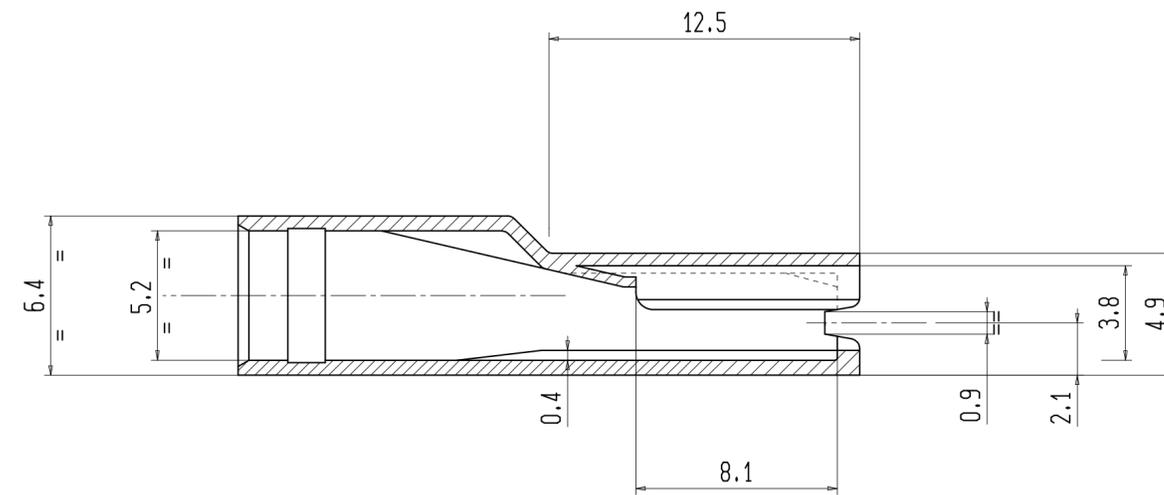

SEC. B-B

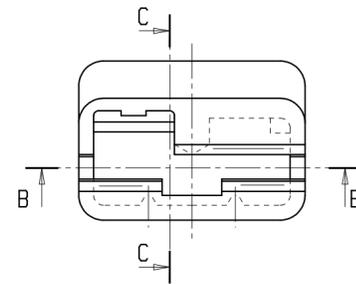

SEC. C-C

DISEGNO PER CLIENTE				CUSTOMER DRAWING																																																				
SOLO PER RIFERIMENTO				FOR REFERENCE ONLY																																																				
ORDER N.	GENERAL TOLLERANCE	Angularity	Non Dimensioned Edges	Surface Roughness																																																				
DRAWING N. PP50163	MATERIAL																																																							
VERSION 4	MOD. INDEX 6	HEAT TREATMENT																																																						
PROJECT				FINISHING																																																				
<table border="1"> <tr> <th>LINEAR</th> <th>Size</th> <th>Fine</th> <th>&gt; 3</th> <th>&gt; 6</th> <th>&gt; 10</th> <th>&gt; 18</th> <th>&gt; 30</th> <th>&gt; 50</th> <th>&gt; 80</th> <th>&gt; 120</th> <th>&gt; 180</th> <th>&gt; 250</th> <th>&gt; 315</th> <th>&gt; 400</th> </tr> <tr> <td>TOLLERANCE</td> <td>±</td> <td>0.03</td> <td>0.04</td> <td>0.05</td> <td>0.06</td> <td>0.07</td> <td>0.08</td> <td>0.1</td> <td>0.11</td> <td>0.13</td> <td>0.15</td> <td>0.16</td> <td>0.18</td> <td>0.2</td> </tr> <tr> <td>ISO J13</td> <td>±</td> <td>-</td> <td>-</td> <td>0.75</td> <td>0.9</td> <td>1.05</td> <td>1.25</td> <td>1.5</td> <td>1.75</td> <td>2</td> <td>2.3</td> <td>2.6</td> <td>2.85</td> <td>3.15</td> </tr> </table>		LINEAR	Size	Fine	> 3	> 6	> 10	> 18	> 30	> 50	> 80	> 120	> 180	> 250	> 315	> 400	TOLLERANCE	±	0.03	0.04	0.05	0.06	0.07	0.08	0.1	0.11	0.13	0.15	0.16	0.18	0.2	ISO J13	±	-	-	0.75	0.9	1.05	1.25	1.5	1.75	2	2.3	2.6	2.85	3.15	<table border="1"> <tr> <td>RED. COPPO</td> <td>DT. 22/06/1988</td> </tr> <tr> <td>APP. TONIOLO</td> <td>DT. 15/05/2019</td> </tr> <tr> <td>RIL. TONIOLO</td> <td>DT. 15/05/2019</td> </tr> <tr> <td>PUB.</td> <td>DT.</td> </tr> </table>		RED. COPPO	DT. 22/06/1988	APP. TONIOLO	DT. 15/05/2019	RIL. TONIOLO	DT. 15/05/2019	PUB.	DT.
LINEAR	Size	Fine	> 3	> 6	> 10	> 18	> 30	> 50	> 80	> 120	> 180	> 250	> 315	> 400																																										
TOLLERANCE	±	0.03	0.04	0.05	0.06	0.07	0.08	0.1	0.11	0.13	0.15	0.16	0.18	0.2																																										
ISO J13	±	-	-	0.75	0.9	1.05	1.25	1.5	1.75	2	2.3	2.6	2.85	3.15																																										
RED. COPPO	DT. 22/06/1988																																																							
APP. TONIOLO	DT. 15/05/2019																																																							
RIL. TONIOLO	DT. 15/05/2019																																																							
PUB.	DT.																																																							
NAME SLEEVE FOR RECEPTACLES 6.3 FRONTAL INSERTION																																																								
<small>INARCA S.p.A. - PADOVA ITALY ACCORDING TO THE LAW RESERVES THE RIGHT OF PROPERTY OF THE PRESENT DRAWING AND ITS REPRODUCTION AND/OR TRANSMISSION WITHOUT EXPRESS AUTHORIZATION BY THE COMPANY IS FORBIDDEN.</small>																																																								

0855163740	PA66UL94U-0	Giallo	
0855163710	PA66UL94U-0	Rosso	
0864163700	PA66UL94U-2GW1750C	Neutro	cURus
0855163700	PA66UL94U-0	Neutro	cURus
0854163700	PA66UL94U-2	Neutro	cURus
CODE	MATERIAL	SURFACE FINISH	VALIDATION