
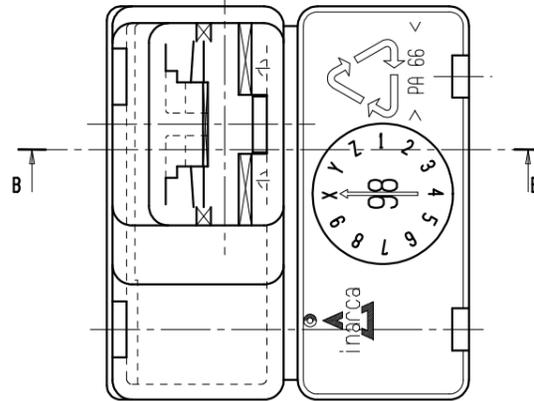
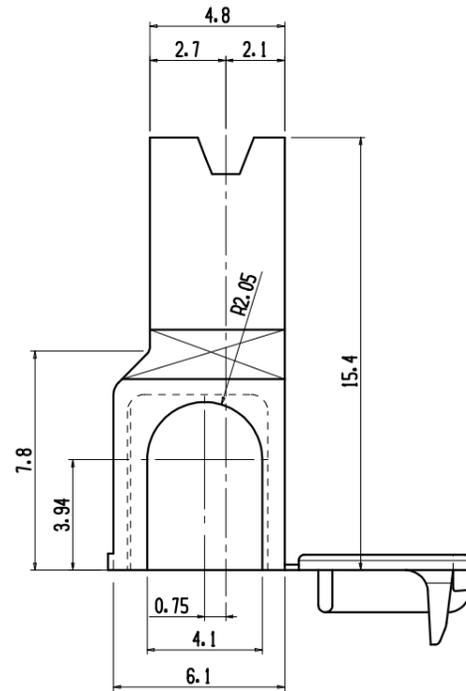
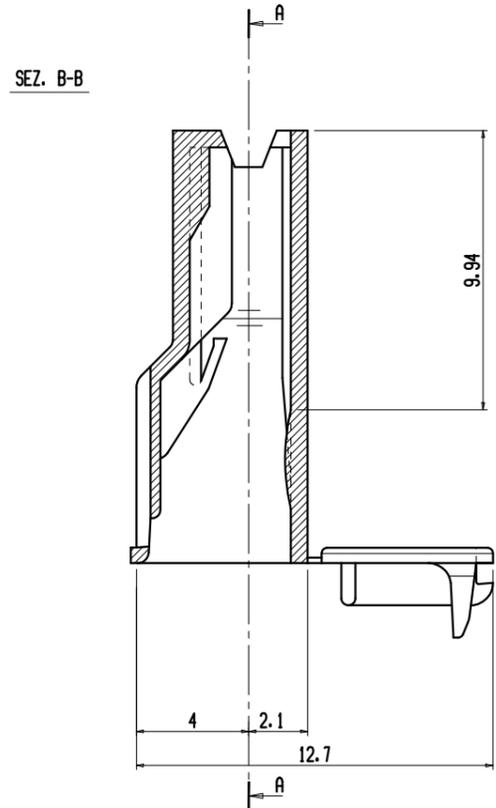


Housing in accordance with Product Technical Specification code STP1340.0630.0000

Internal housing fits 4.8 mm female flag-type Low Insertion terminals coded PL11412-11413 (see PR500004880 for assembly)

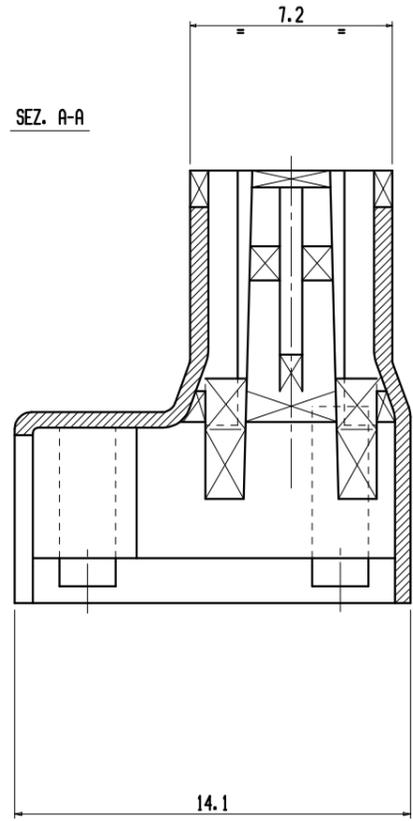

DISEGNO PER CLIENTE

CUSTOMER DRAWING

SOLO PER RIFERIMENTO

FOR REFERENCE ONLY

ORDER N.	GENERAL TOLERANCE	Angularity	Non Dimensioned Edges	Surface Roughness	 Connecting energy. Energia in connessione <small>Inarca spa - Vigodarzere (PD) Italy</small>
DRAWING N. PP50350	MATERIAL				
VERSION 4 MOD. INDEX 5	HEAT TREATMENT				
PROJECT	FINISHING				
QUANTITY	LINEAR TOLERANCE	Size	f <sub>ind</sub>	a	
mm	ISO J13	±	0.03	0.04	
INCH		±	0.07	0.09	
		±	0.11	0.14	
		±	0.17	0.2	
		±	0.23	0.27	
		±	0.32	0.36	
		±	0.4	0.45	
		±	0.5	0.5	

INARCA S.p.a. PADOVA ITALY ACCORDING TO THE LAW RESERVES THE RIGHT OF PROPERTY OF THE PRESENT DRAWING AND ITS REPRODUCTION AND/OR TRANSMISSION WITHOUT EXPRESS AUTHORIZATION BY THE COMPANY IS FORBIDDEN.

7	6450350750	PA66-V2 NO-FLAME		
6	6450350700	PA66-V2 NO-FLAME		
5	5550350750			Verificare/Verify
4	5450350750			
3	6250350700	PA6-V2 NCF	NATURAL	
2	5550350700	PA66-V0	NATURAL	
1	5450350700	PA66-V2	NATURAL	NO/NOT
POS	CODICE	MATERIALE	FINITURA	OMOLOGAZIONE