


- 01 Suitable with connecting pin \varnothing 4 mm
- 02 Wire range: 0.5-1.5 mmq
Sheat range: 1.9-3.3 mm
Crimped with linear miniapplicator code AT750210415

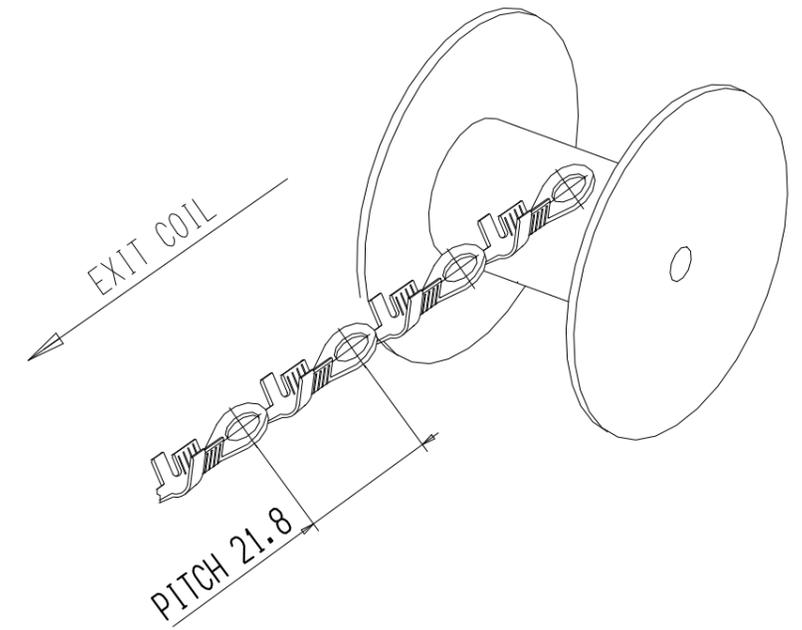

DISEGNO PER CLIENTE
SOLO PER RIFERIMENTO

CUSTOMER DRAWING
FOR REFERENCE ONLY

ORDER N.	GENERAL TOLLERANCE	Angularity	Non Dimensioned Edges	Surface Roughness
DRAWING N. PL10577	MATERIAL			
VERSION 4 MOD. INDEX	HEAT TREATMENT			
PROJECT	FINISHING			
	LINEAR TOLLERANCE ISO J13	TOLERANCES UNLESS OTHERWISE SPECIFIED ± 0.2 mm		



RED. GRIGOLON	DT. 15/02/1990
APP. TONIOLO	DT. 02/12/2021
RIL. TONIOLO	DT. 02/12/2021
PUB.	DT.

NAME RING TERMINAL D=4.3 X 8.7 X 20 0.5-1.5

INARCA S.p.a. PADOVA ITALY ACCORDING TO THE LAW RESERVES THE RIGHT OF PROPERTY OF THE PRESENT DRAWING AND ITS REPRODUCTION AND/OR TRANSMISSION WITHOUT EXPRESS AUTHORIZATION BY THE COMPANY IS FORBIDDEN.

0210577401	Fe	NichelPlated	
0010577201	CuZn	TinPlated	
0010577001	CuZn	-	
CODE	MATERIAL	SURFACE FINISH	VALIDATION